




**LEMI-030 Satellite synchronized
ULF induction magnetometer set**



KMS Technologies

KJT Enterprises Inc.
11999 Katy Freeway Suite 200
Houston, TX 77079
USA

Tel: +1.713.532.8144

Email: info@KMSTechnologies.com
www.KMSTechnologies.com

LLC "LEMI"

5A Naukova St., Office 301,
Lviv, 79060, Ukraine


Tel: (380) 32 2540251

Email: info@LEMIsensors.com
<http://www.LEMIsensors.com>

LEMI-030



LEMI-030 Product picture;

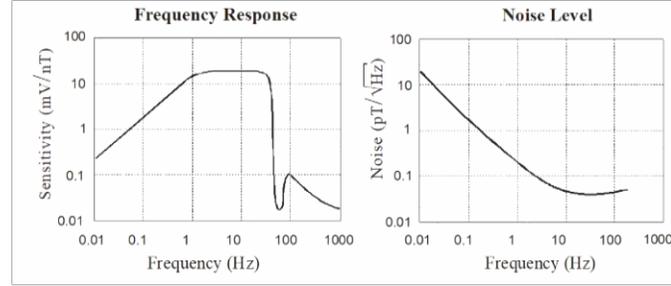

Frequency response;

Noise level

The complete set of magnetometer consists of three LEMI-30 sensors and one communication unit (CAM unit), which connects the sensors to PC and provides their power supply, satellite synchronization of data sampling and digitizing. The induction magnetometer LEMI-30 is intended for the study of magnetic field fluctuations in the frequency band 0.001 ... 30 Hz in land conditions and is ideal for ULF earthquake precursors monitoring. It can be used both as a part of the computer measuring and registration equipment and autonomously with any analogue recorder. All three LEMI 30 sensors are similar within 0,1 dB.

Product specifications

Frequency band of received signals	0.001 ... 30 Hz
Transformation coefficient value on 2 symmetrical outputs:	
on the flat part	20 mV/nT
on the linear part	20* f mV/nT
f is the frequency of received signal.	
Transformation coefficient error	≤ 3 dB
Noise rejection on (50 ± 0.2) or (60 ± 0.2) Hz	> 60 dB
ADC (CAM unit) resolution	24 bit
GPS sampling synchronization and coordinates determination	
Power supply voltage	± (6...12) V
Total power consumption	< 3 W
Temperature range of operation	minus 10 + 50⁰ C
Outer dimensions	l = 870 mm; d = 85 mm
Weight of one sensor	5.6 kg
Waterproof housing	
Maximum length of connecting cable	200 m